


Gold Standard Wire Rope Slings


Rugged and reliable, the flemish eye spliced with carbon steel sleeves offer the greatest safety in a wire rope choker. This construction offers 93-95% wire rope efficiency. Inspection is facilitated by painting sleeves gold to verify swaging is complete and proper. Capacity/Care and Instruction tag attached. Proof testing and certification available upon request.

Quality and safety... hallmarks of the Gold Standard

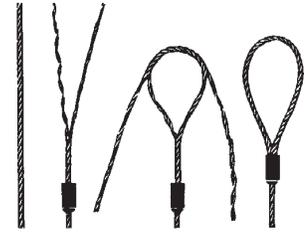

SW100 Single Leg Wire Rope Sling
Flemish Eye, Mechanical Splice

SW100 Single Leg

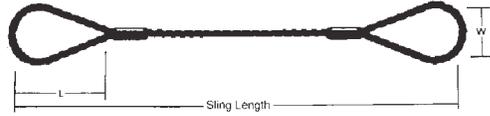


Rope Diameter	Minimum Sling Length	Rated Capacity in Tons			Standard Eye Size (in.)		Eye Hook Capacity
		Vertical	Choker	Basket*	Eye Width (W)	Eye Length (L)	
6x19 Class - Extra improved plow steel IWRC							
1/4"	1'-6"	.65	.48	1.3	2"	4"	1 ton A
5/16"	1'-9"	1.0	.75	2.0	2-1/2"	5"	1 ton A
3/8"	2'-0"	1.4	1.1	2.9	3"	6"	2 ton A
1/2"	2'-6"	2.5	1.9	5.1	4"	8"	3 ton A
5/8"	3'-0"	3.9	2.9	7.8	5"	10"	4.5 ton A
3/4"	3'-6"	5.6	4.1	11.0	6"	12"	7 ton A
7/8"	4'-0"	7.6	5.6	15.0	7"	14"	7.5 ton C
1"	4'-6"	9.8	7.2	20.0	8"	16"	10 ton C
6x37 Class - Extra improved plow steel IWRC							
1-1/8"	5'-0"	12.0	9.1	24.0	9"	18"	15 ton A
1-1/4"	5'-6"	15.0	11.0	30.0	10"	20"	15 ton A
1-3/8"	6'-0"	18.0	13.0	36.0	11"	22"	22 ton A
1-1/2"	7'-0"	21.0	16.0	42.0	12"	24"	22 ton A

* Basket hitch is based on a D/d ration of 20 or greater, where D = Diameter of Curvature around which the body of the sling is bent, and d=Diameter of Wire Rope.

SC100 Sliding Choker

Safeway Sliding Choker Slings are specially designed for quick, efficient choker operation.

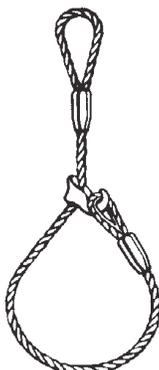


Style A

Rope Diameter	Rated Capacity (Tons)	Eye Dimensions	
		W	L
3/8"	1.1	3"	6"
1/2"	1.9	4"	8"
5/8"	2.9	5"	10"
3/4"	4.1	6"	12"
7/8"	5.6	7"	14"
1"	7.2	8"	16"

* Style A is standard. Style B available on request. Latched choker hooks available on special order.

Our Standard SC100 is furnished with standard eye one end and thimble eye other end. Please specify at order placement if you require standard eyes (no thimble) on both ends (Style B).

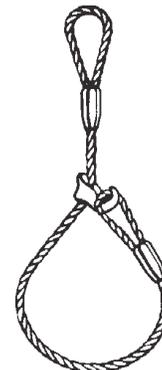

Style B




Do not exceed capacities. Inspect wire rope sling and consult industry recommendations and OSHA Standards before each use. Wire rope slings may fail if damaged, abused, misused, overused, or improperly maintained.

Larger rope sizes available but not illustrated. Please consult the factory for items not shown. All Safeway Wire Rope Slings comply with current A.N.S.I. and OSHA requirements.


Safeway Multi-Leg Bridles and Cable-Laid Slings

Two-Leg Wire Rope Sling - SW200

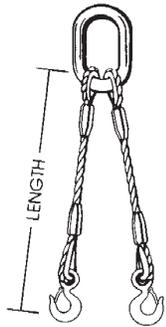


Rope Diam.	Minimum Leg Lenth	Rated Capacity (Tons)			Oblong Link Size	Hook	Eye Hook Size	
		60°	45°	30°			T	L
1/4"	1'-3"	1.1	.91	.65	1/2"x2-1/2"x5"	1 Ton A	15/16"	3-1/4"
3/8"	1'-8"	2.5	2.0	1.4	1/2"x2-1/2"x5"	2 Ton A	1"	4"
1/2"	2'-0"	4.4	3.6	2.5	3/4"x2-3/4"x5-1/2"	3 Ton A	1-1/4"	4-5/8"
5/8"	2'-4"	6.8	5.5	3.9	1"x3-1/2"x7"	4.5 Ton A	1-1/2"	5-3/4"
3/4"	2'-9"	9.7	7.9	5.6	1-1/4"x4-3/8"x8-3/4"	7 Ton A	1-7/8"	7-3/8"
7/8"	3'-3"	13	11	7.6	1-1/4"x4-3/8"x8-3/4"	7.5 Ton C	2-1/4"	9-1/16"
1"	3'-6"	17	14	9.8	1-1/2"x5-1/4"x10-1/2"	10 Ton C	2-1/2"	10"

Three-Leg Wire Rope Sling - SW300

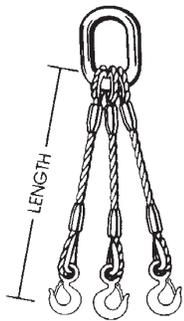

Rope Diam.	Minimum Leg Lenth	Rated Capacity (Tons)			Oblong Link Size	Hook	Eye Hook Size	
		60°	45°	30°			T	L
1/4"	1'-3"	1.7	1.4	.97	1/2"x2-1/2"x5"	1 Ton A	15/16"	3-1/4"
3/8"	1'-8"	3.7	3.0	2.2	3/4"x2-3/4"x5-1/2"	2 Ton A	1"	4"
1/2"	2'-0"	6.6	5.4	3.8	1"x3-1/2"x7"	3 Ton A	1-1/4"	4-5/8"
5/8"	2'-4"	10	8.3	5.9	1-1/4"x4-3/8"x8-3/4"	4.5 Ton A	1-1/2"	5-3/4"
3/4"	2'-9"	15	12	8.4	1-1/2"x5-1/4"x10-1/2"	7 Ton A	1-7/8"	7-3/8"
7/8"	3'-3"	20	16	11	1-1/2"x5-1/4"x10-1/2"	7.5 Ton C	2-1/4"	9-1/16"
1"	3'-6"	26	21	15	1-3/4"x6"x12"	10 Ton C	2-1/2"	10"

Four-Leg Wire Rope Sling - SW400

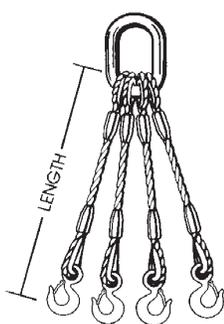

Rope Diam.	Minimum Leg Lenth	Rated Capacity (Tons)			Oblong Link Size	Hook	Eye Hook Size	
		60°	45°	30°			T	L
3/8"	1'-8"	5.0	4.1	2.9	3/4"x2-3/4"x5-1/2"	2 Ton A	1"	4"
1/2"	2'-0"	8.8	7.1	5.1	1"x3-1/2"x7"	3 Ton A	1-1/4"	4-5/8"
5/8"	2'-4"	14	11	7.8	1-1/4"x4-3/8"x8-3/4"	4.5 Ton A	1-1/2"	5-3/4"
3/4"	2'-9"	19	16	11	1-1/2"x5-1/4"x10-1/2"	7 Ton A	1-7/8"	7-3/8"
7/8"	3'-3"	26	21	15	1-3/4"x6"x12"	7.5 Ton C	2-1/4"	9-1/16"
1"	3'-6"	34	28	20	2"x7-1/2"x13-3/4"	10 Ton C	2-1/2"	10"

Larger wire rope slings available but not illustrated. Consult factory for items or capacities not shown.

Ultra-flexible Cable-Laid Slings - SW100 Cable-Laid




Cable-Laid Slings are fabricated from rope consisting of galvanized aircraft cables. This results in a rope that is extremely flexible as well as corrosion resistant.

Rope Diameter (in.)	Classifications	Minimum Sling Length (ft.)	Rated Capacity (Tons)			Eye Size (in.)
			Vertical	Choker	Basket*	
3/8"	7x7x7 GAC	2'-0"	1.1	.74	2.2	3" x 6"
1/2"	7x7x7 GAC	2'-6"	1.9	1.3	3.7	4" x 8"
5/8"	7x7x7 GAC	3'-0"	2.8	1.9	5.5	5" x 10"
3/4"	7x7x19 GAC	3'-6"	4.1	2.8	8.1	6" x 12"
7/8"	7x7x19 GAC	4'-0"	5.4	3.7	11	7" x 14"
1"	7x7x19 GAC	4'-6"	6.9	4.7	14	8" x 16"

Hand Spliced Wire Rope Chokers

Preferred by erecting contractors, the Safeway **Tapered & Concealed Hand Spliced Wire Rope Choker** has no equal. With a flexible fiber core and no steel sleeves, the tapered, hidden tuck splice avoids snagging under load.

SW100 - Hand Spliced

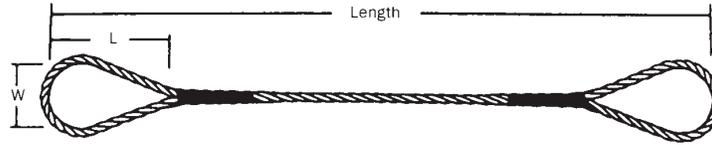

Rope Diameter (in.)	Minimum Sling Length (ft.)	Rated Capacity (Tons)			Standard Eye Size (in.)	
		Vertical	Choker	Basket*	Width	Length
6x19 Class - Extra Improved Plow Steel Fiber Core						
3/8"	3'-0"	1.2	.94	2.2	3"	6"
1/2"	4'-0"	2.0	1.6	4.0	4"	8"
5/8"	4'-0"	3.1	2.6	6.2	5"	10"
3/4"	5'-6"	4.3	3.7	8.6	6"	12"
7/8"	6'-0"	5.7	5.0	11	7"	14"
1"	7'-0"	7.4	6.4	15	8"	16"

* Basket hitch is based on a D/d ratio of 20 or greater where D=Diameter of Curvature around which the body of the sling is bent, and d=diameter of Wire Rope.



Warning! Do not exceed rated capacities. Inspect wire rope sling and consult industry recommendations and OSHA Standards before each use. Wire rope slings may fail if damaged, abused, misused, overused, or improperly maintained.

Other Wire Rope Products

Safeway's Rigging Department can also furnish:

- 6-part Flat & 8-part Round Braid Slings
- Cable Assemblies
- Overhead Crane Hoist Assemblies
- Winch Lines
- Bulk Wire Rope
- Aircraft Cable

Contact our Sales Department with your specifications.

How to Order Wire Rope Slings

Determine the weight of the load and consider angle of sling to load. Specify:

1. Wire rope diameter (inches)
2. Sling length (feet - bearing point to bearing point)
3. Class of wire rope (6x19 or 6x37 class)
4. Any attachment (hooks, thimbles, etc.)

Examples of other standard combinations:



Eye & Hook



Crescent Thimble & Crescent Thimble



Slip-Thru Thimble & Slip-Thru Thimble



Thimble & Thimble




Thimble & Hook




Alloy "S" and "J" Hooks

Safeway's metal fabrication division fabricates a complete line of "S" and "J" hooks for your overhead lifting and paintline applications. Made only of domestic 8620 alloy steel rod, these hooks represent the ultimate in strength and reliability. Items shown below are a sampling of the most commonly used types and sizes of "S" and "J" hooks. For sizes and capacities of items not shown, contact our sales team.

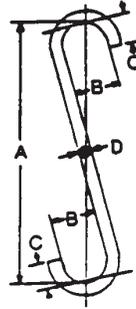

Alloy "S" Hooks

Material Diameter	Safeway Stock No.	Dimensions				Working Load Limit (lbs)
		A	B	C	D	
5/16"	SSA 0312	2-3/4"	3/4"	3/4"	5/16"	325
3/8"	SSA 0375	4-1/8"	1-1/8"	1-1/8"	3/8"	425
1/2"	SSA 0500	5-1/2"	1-1/2"	1-1/2"	1/2"	775
5/8"	SSA 0625	7"	1-7/8"	1-7/8"	5/8"	1225
3/4"	SSA 0750	8-1/4"	2-1/4"	2-1/4"	3/4"	1750
7/8"	SSA 0875	9-1/2"	2-5/8"	2-5/8"	7/8"	2400
1"	SSA 1000	11"	3"	3"	1"	3000

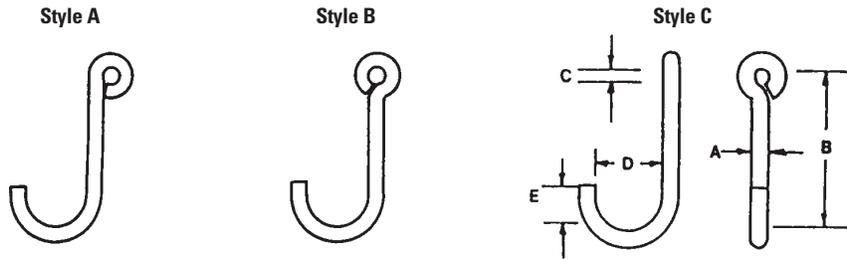

Alloy "J" Hooks

Material Diameter (A)	Safeway Stock No.	Dimensions				Working Load Limit (lbs)
		B	C	D	E	
5/16"	SJA 0312	5"	3/4"	1-1/4"	7/8"	250
3/8"	SJA 0375	6"	3/4"	1-1/2"	1-1/8"	350
1/2"	SJA 0500	8"	3/4"	2"	1-1/2"	650
5/8"	SJA 0625	9"	1"	2-1/2"	1-7/8"	850
3/4"	SJA 0750	10"	1"	3"	2-1/4"	1,200
7/8"	SJA 0875	12"	1"	3-1/2"	2-5/8"	1,500
1"	SJA 1000	14"	1-1/4"	4"	3"	2,000

All dimensions above in inches. Larger diameters are available, please consult factory. All hooks stamped with working load limit, heat treated, proof tested and certified.



Warning! Do not exceed working load limit.